



**Massachusetts Water Resources Authority  
Deer Island Treatment Plant Performance  
December 2004**

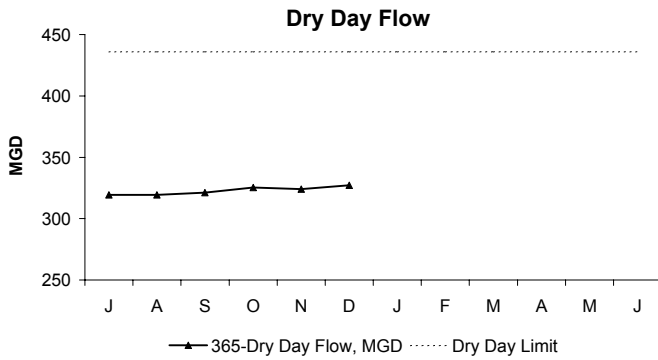


December's Dry Day Flow is the average of all dry day flows for the period from 1/2/2004 to 12/31/2004.

Dry Day Flow is calculated by averaging influent flows over the previous 365 days during dry weather.

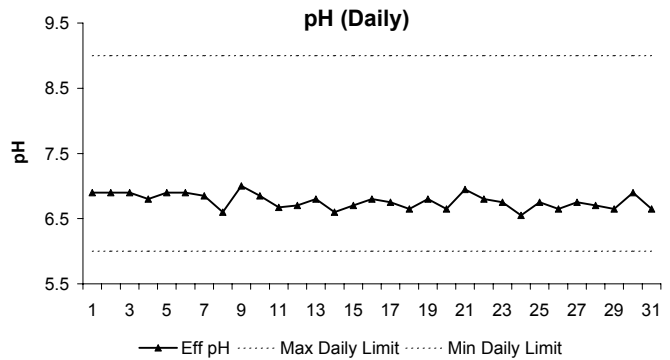


In the 2nd Quarter of FY05, all pH measurements were typical for the season and within permit limits.


pH is a measure of the acidity or basicity of the effluent. Small fluctuations in pH do not have an adverse effect on marine environments. Because pure oxygen is used in the activated sludge reactors, the effluent pH tends to be at the lower pH range.

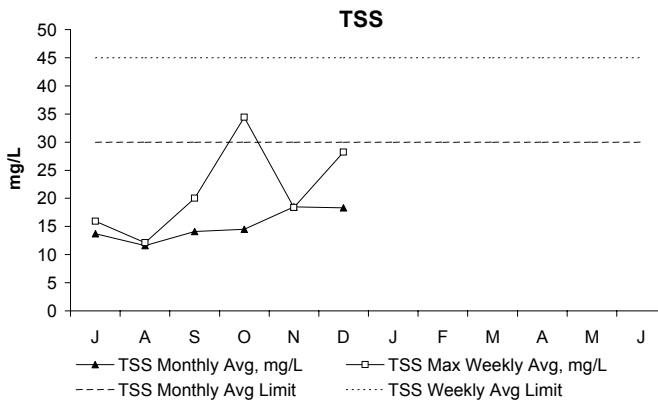


In the 2nd Quarter of FY05, both the weekly and monthly concentrations of TSS were below permit limits. TSS, or Total Suspended Solids in the effluent, is a measure of the amount of solids that remain suspended after treatment.

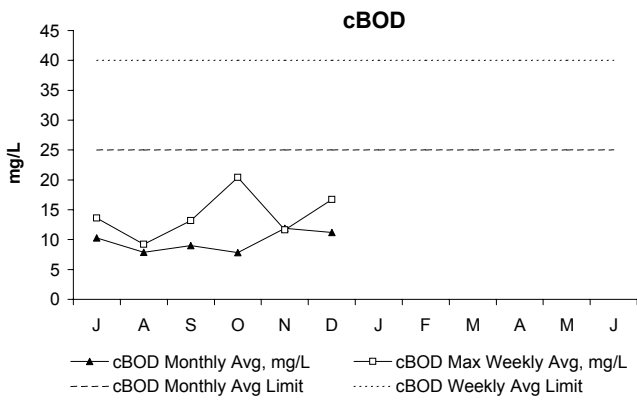

In the 2nd Quarter of FY05, both the weekly and monthly concentrations of cBOD were below permit limits. cBod, or Carbonaceous Biochemical Oxygen Demand, is a measure of the amount of dissolved oxygen required for the decomposition of organic materials in the environment.

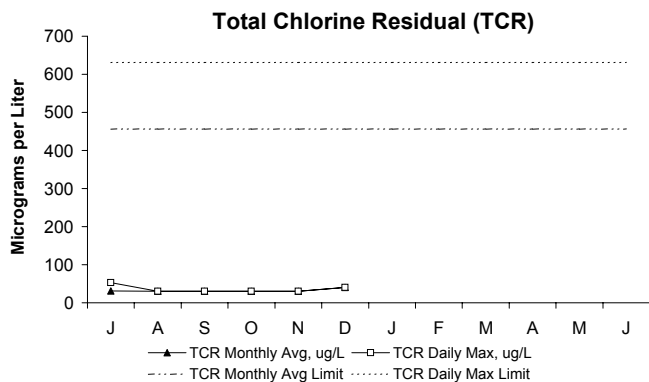

In the 2nd Quarter of FY05, both the maximum daily and monthly concentrations of TCR were below permit limits. TCR, or Total Chlorine Residual in the effluent, is a measure of the amount of chlorine that remains after the disinfection/dechlorination process. If the chlorine residual in the effluent is too high, it may threaten marine organisms.

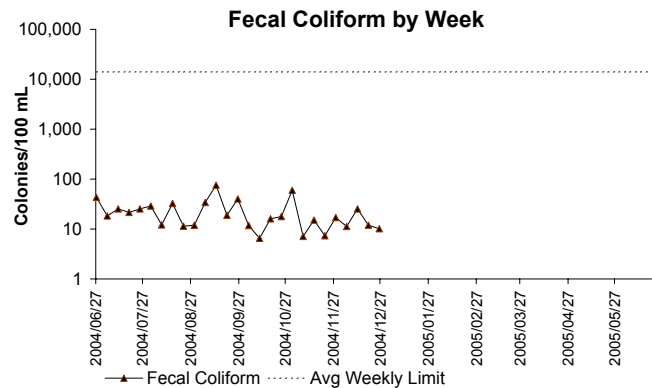

In the 2nd Quarter of FY05, all permit conditions were met. Fecal Coliform is an indicator of the presence of pathogens. The levels of these bacteria after disinfection show how effectively the plant is inactivating many forms of disease-causing microorganisms. There are four conditions in the permit that must be met: daily geometric mean; weekly geometric mean; 10% of all samples; and greater than three consecutive samples not to exceed 14,000 col/100mL.