

MASSACHUSETTS WATER RESOURCES AUTHORITY
Deer Island, 33 Tafts Avenue, Boston, Massachusetts 02128



WATER QUALITY UPDATE
An Analysis of August 2026 Sampling Data

For more information, please contact MWRA at (617) 242-6000, or visit www.mwra.com.

August 2026 Highlights

- **In August, MWRA met all regulatory targets for pathogen inactivation at Brutsch Water Treatment Facility and Carroll Water Treatment Plant**, achieving greater than the required 99% *Cryptosporidium* inactivation and 99.9% *Giardia* inactivation at all times. See pages 5 and 6.
- **MWRA met all regulatory targets for the month.** One community triggered the requirement for an Assessment under the Revised Total Coliform Rule. See Page 7.
- **To reduce paper usage, printing, and postage costs, and to provide the most detailed information on water quality, MWRA changed to an electronic version of this report in 2015.**

We are continually updating the report. Let us know what you think.

Call (617) 242-5323

Release Date: September 20, 2026

Water Quality Update


This is a monthly report about the quality of water supplied by MWRA. It provides a more detailed review than the annual water quality report that is mailed each June. The reports are available at www.mwra.com. Data within this report are subject to verification and correction.

The Water System

The MWRA supplies wholesale water to local water departments in 53 communities, 47 in greater Boston and MetroWest, three in Western Massachusetts, and as a back-up supply for three others. Each municipality is responsible for distributing the water within its own community. More than two million people are served by the MWRA water supply system, and about 200 million gallons are supplied each day. Quabbin Reservoir is the primary source of water for the whole MWRA system, and one of the country's largest reservoirs, with a capacity of 412 billion gallons. Within this report, Quabbin water represents source water for the three communities in the Chicopee Valley Aqueduct (CVA) system (Chicopee, Wilbraham and South Hadley FD1).

Water is then transferred from Quabbin Reservoir to the 65 billion gallon Wachusett Reservoir in Clinton via the Quabbin Aqueduct. Within this report, Wachusett water represents source water for MetroWest and Metropolitan Boston communities. The 401-square mile watershed areas of the Quabbin and Wachusett Reservoirs are naturally protected with over 85% of the watersheds covered in forest and wetlands. To ensure the safety of the water, the Department of Conservation and Recreation (DCR) patrols the watersheds, and with cooperation from MWRA, tests the streams and reservoirs frequently.

The map below indicates the location of reservoirs, treatment facilities, and service communities.

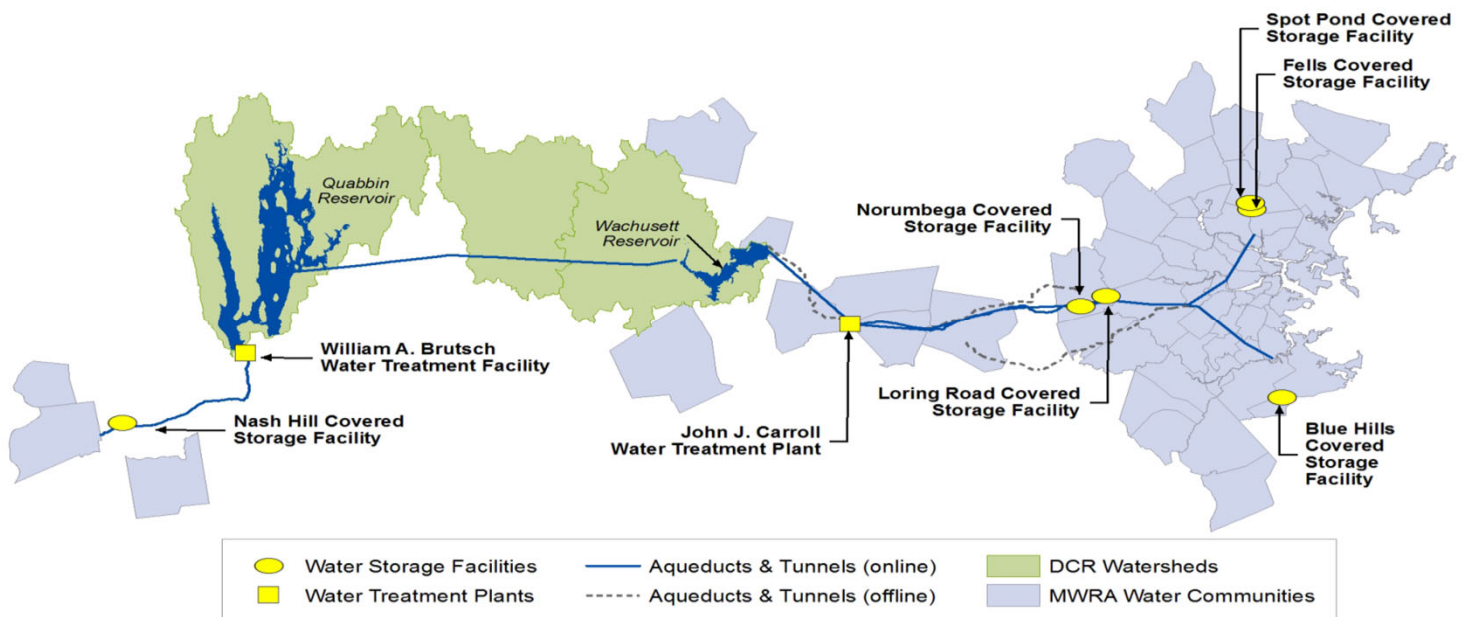

Water Treatment

The water MWRA supplies from the Wachusett Reservoir is treated at the state-of-the-art John J. Carroll Treatment Plant. The water is treated with ozone, sodium bisulfite for ozone quench, ultra-violet light (UV), sodium carbonate and carbon dioxide for corrosion control, fluoride, and chloramines. Water supplied from the Quabbin Reservoir is treated at the William A. Brutsch Water Treatment Facility with UV and chlorine. Each of the three CVA communities provides corrosion control.

Indicators of Water Quality

MWRA tests the water extensively for over 120 different contaminants and parameters across the system; this includes several hundred thousand tests each year. EPA and MA DEP set the standards for source and treated water quality, and include standards for total and fecal coliform, turbidity, disinfection and disinfection by-products, pathogens, metals, and other potential chemical contaminants. A full list is available at www.mwra.com. Tests are conducted on water sampled at the source reservoirs (source or "raw water") and also on water after treatment ("treated water"). MWRA also routinely monitors for a variety of parameters that tell us about disinfection, corrosivity, and the organic and inorganic constituents in the water. Testing frequencies vary by parameter.

Customer communities must also meet certain standards under the EPA regulations concerning distribution of treated drinking water. The Total Coliform Rule (TCR) helps to alert communities to possible microbial contamination as well as the adequacy of residual disinfection within the local distribution system. MWRA tests over 2,000 community samples per month.

Source Water – Microbial and UV-254 Results

August 2026

Source Water - Microbial Results

Total coliform bacteria are monitored in both source and treated water to provide an indication of overall bacteriological activity. Most coliforms are harmless. However, fecal coliform, a subclass of the coliform group, are identified by their growth at temperatures comparable to those in the intestinal tract of mammals. They act as indicators of possible fecal contamination. The Surface Water Treatment Rule for unfiltered water supplies allows for no more than 10% of source water samples prior to disinfection over any six-month period to have more than 20 fecal coliforms per 100mL.

Sample Site: Quabbin Reservoir

Quabbin Reservoir water is sampled at the Brutsch Water Treatment Facility raw water tap before being treated and entering the CVA system.

Four of the 31 samples was positive this month. **For the current six-month period, 0.0% of the samples have exceeded a count of 20 cfu/100mL.**

Sample Site: Wachusett Reservoir

Wachusett Reservoir water is sampled at the Carroll Water Treatment Plant raw water tap in Marlborough before being treated and entering the MetroWest/Metropolitan Boston systems.

In the wintertime when smaller water bodies near Wachusett Reservoir freeze up, many waterfowl will roost in the main body of the reservoir - which freezes later. This increased bird activity tends to increase fecal coliform counts. DCR has an active bird harassment program to move the birds away from the intake area.




Twelve of the 31 samples were positive this month. None of the samples exceeded a count of 20 cfu/100mL. **For the current six-month period, 0.0% of the samples have exceeded a count of 20 cfu/100mL.**

Source Water - UV Absorbance

UV Absorbance at 254nm wavelength (UV-254), is a measure of the amount and reactivity of natural organic material in source water. Higher UV-254 levels cause increased ozone and chlorine demand resulting in the need for higher ozone and chlorine doses, and can increase the level of disinfection by-products. UV-254 is impacted by tributary flows, water age, sunlight and other factors.

Quabbin Reservoir UV-254 levels averaged 0.023 A/cm for the month.

Wachusett Reservoir UV-254 levels averaged 0.044 A/cm for the month.

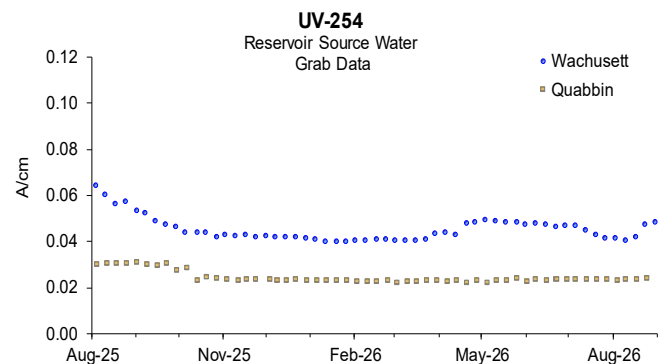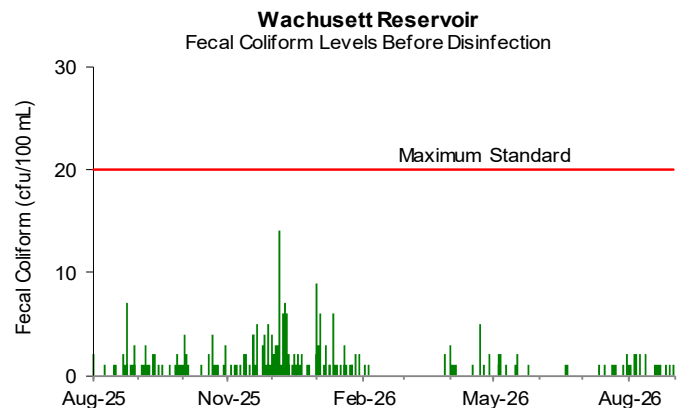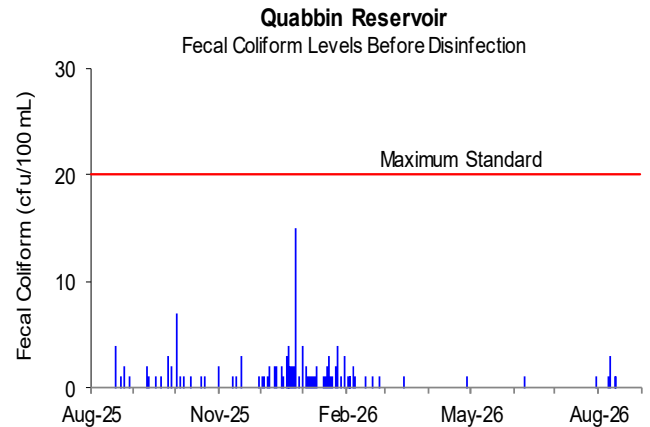

Source Water – Turbidity and Algae Results



August 2026

Source Water - Turbidity Results

Turbidity is a measure of suspended and colloidal particles including clay, silt, organic and inorganic matter, algae and microorganisms. The effects of turbidity depend on the nature of the matter that causes the turbidity. High levels of particulate matter may have a higher disinfectant demand or may protect bacteria from disinfection effects, thereby interfering with the disinfectant residual throughout the distribution system.

There are two standards for turbidity: all water must be below five NTU (Nephelometric Turbidity Units), and water can only be above one NTU if it does not interfere with effective disinfection.

Turbidity of Quabbin Reservoir water is monitored continuously at the Brutch Water Treatment Facility (BWTF) before UV and chlorine disinfection. Turbidity of Wachusett Reservoir is monitored continuously at the Carroll Water Treatment Plant (CWTP) before ozonation and UV disinfection. Maximum turbidity results at Quabbin and Wachusett were within DEP standards for the month.

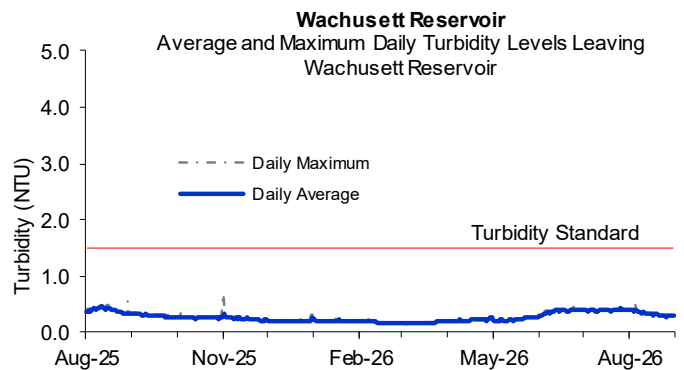
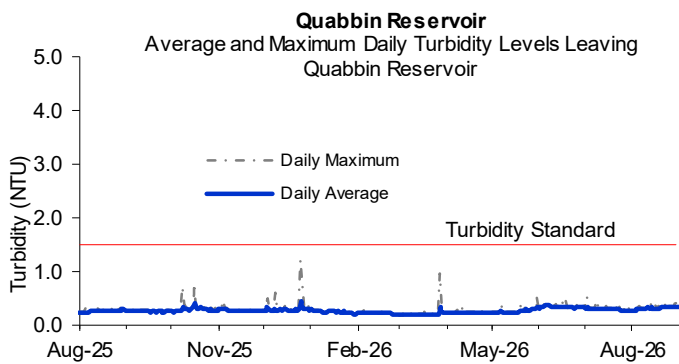


Source Water - Algae Levels

Algae levels in the Wachusett and Quabbin Reservoir are monitored by DCR and MWRA. These results, along with taste and odor complaints, are used to make decisions on source water treatment for algae control.

Taste and odor complaints at the tap may be due to algae, which originate in source reservoirs, typically in trace amounts. Occasionally, a particular species grows rapidly, increasing its concentration in water. When *Synura*, *Dolichospermum* (formerly called Anabaena), or other nuisance algae bloom, MWRA may treat the reservoirs with copper sulfate, an algacide. During the winter and spring, diatom numbers may increase. While diatoms are not a taste and odor concern, consumers using filters may notice more frequent changing of the filters is needed.

No complaints which may be related to algae were reported this month from local water departments.

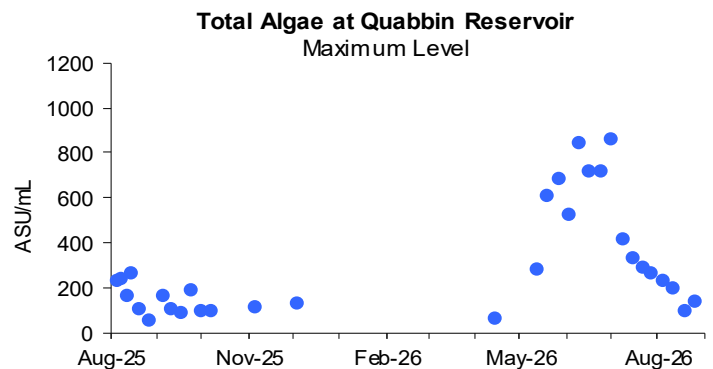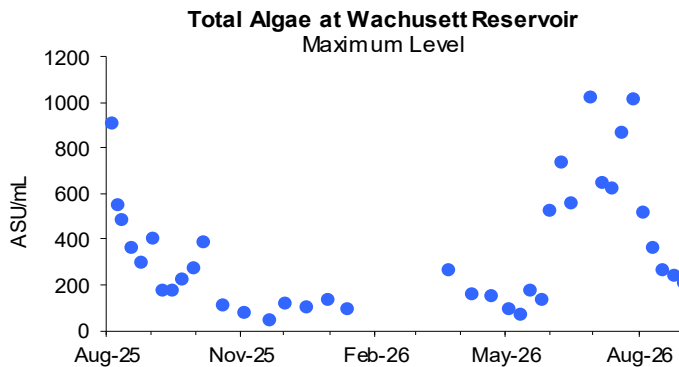

Treated Water – Disinfection Results

August 2026





Treated Water - Primary Disinfection

At the Carroll Water Treatment Plant (CWTP), MWRA meets the required 99.9% (3-log) inactivation of *Giardia* using ozone (reported as CT: concentration of disinfectant x contact time) and the required 99% (2-log) inactivation of *Cryptosporidium* using UV (reported as IT: intensity of UV x time). MWRA calculates inactivation rates hourly and reports *Giardia* inactivation at maximum flow and *Cryptosporidium* inactivation at minimum UV dose. MWRA must meet at least 100% of required CT and IT.

CT achievement for *Giardia* assures CT achievement for viruses, which have a lower CT requirement. For *Cryptosporidium*, there is also an “off-spec” requirement. Off-spec water is water that has not reached the full required UV dose or if the UV reactor is operated outside its validated ranges. No more than 5% off-spec water is allowed in a month.

Wachusett Reservoir - MetroWest/MetroBoston Supply





- The chlorine dose at the CWTP varied between 3.5 to 3.7 mg/L for the month.
- Ozone dose at the CWTP varied between 1.5 to 1.9 mg/L for the month.
- Giardia* CT was maintained above 100% at all times the plant was providing water into the distribution system during the month.
- Cryptosporidium* IT was maintained above 100% during the month. Off-spec water was less than 5%.
- During November 2025, automated programming for determining ozone CT at CWTP transitioned to using valve position to determine ozone flow activity in lieu of diffuser flow meters that have become obsolete and less reliable for determining ozone flow activity. Additionally, an ozone grid operational change resulted in lower ozone residuals, thus a lower CT inactivation than typical, but still within compliance.

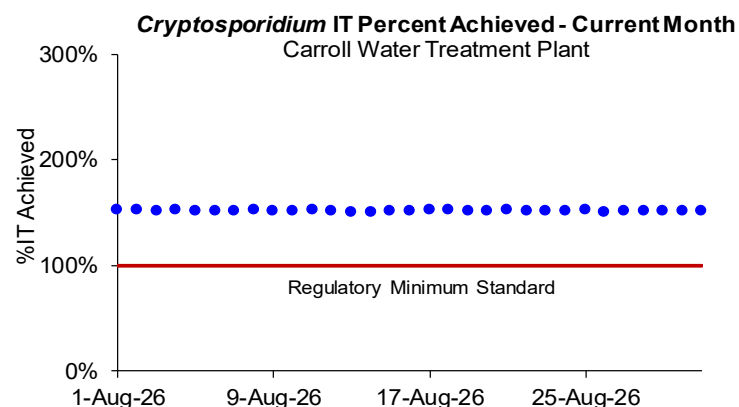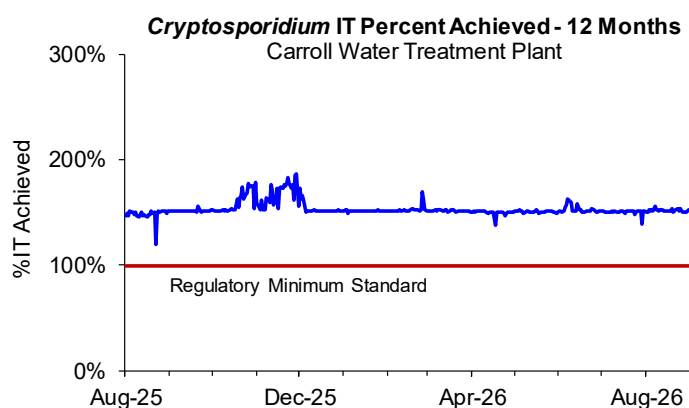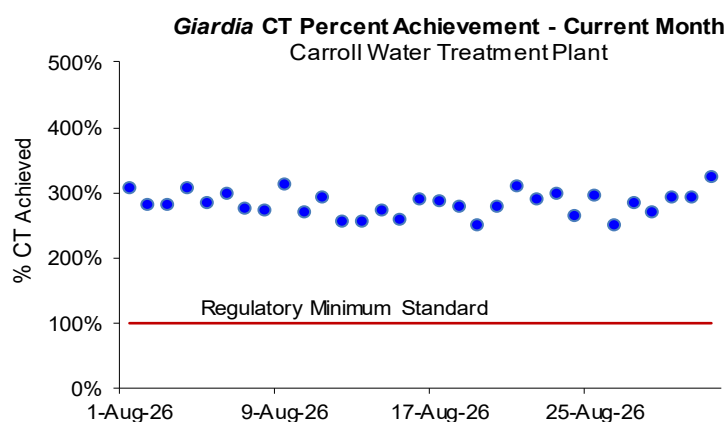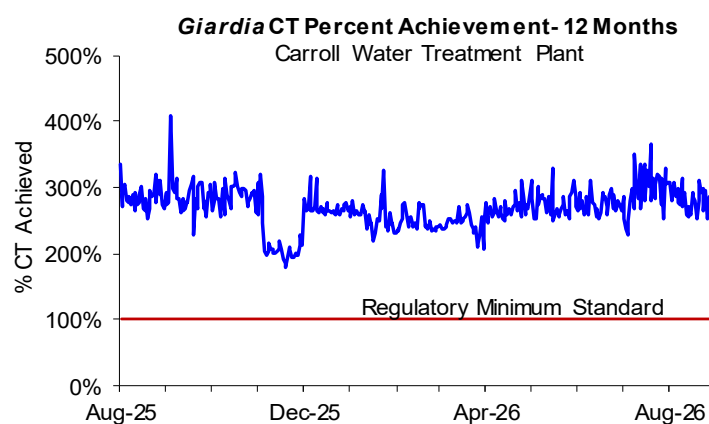

Treated Water – Disinfection, pH and Alkalinity Results August 2026

Quabbin Reservoir at Brutsch Water Treatment Facility (BWTF) (CVA Supply)

- The chlorine dose at BWTF is adjusted in order to achieve MWRA's seasonal target of 0.70 to 0.75 mg/L (January 1 – March 31), 0.75 to 0.80 mg/L (April 1 – June 30 and November 1 – December 31), and 0.85 to 1.05 mg/L (July 1 – October 31) at Ludlow Monitoring Station.
- The chlorine dose at BWTF varied between 1.74 to 1.80 mg/L for the month.
- Giardia* CT was maintained above 100% at all times the plant was providing water into the distribution system during the month.
- Cryptosporidium* IT was maintained above 100% during the month. Off-spec water was less than 5%.

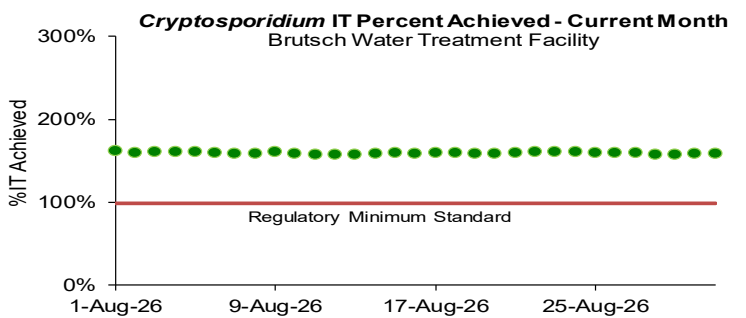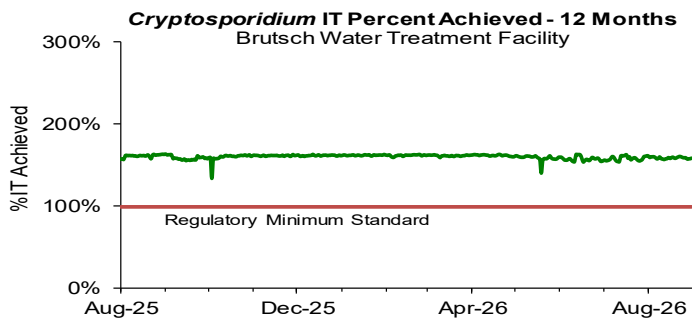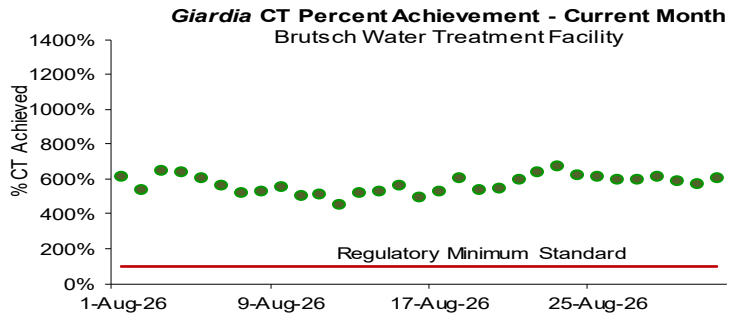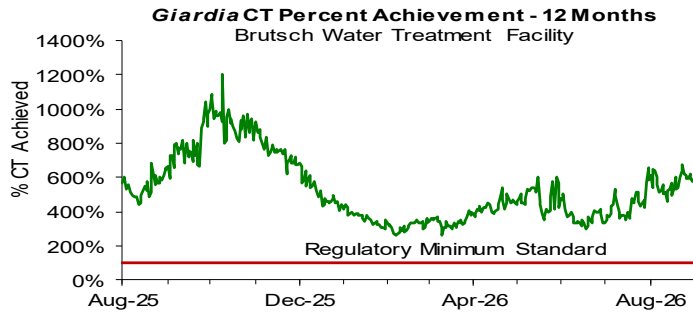



Treated Water - pH and Alkalinity Compliance

MWRA adjusts the alkalinity and pH of Wachusett water at CWTP to reduce its corrosivity, which minimizes the leaching of lead and copper from service lines and home plumbing systems into the water. MWRA's target for distribution system pH is 9.3; the target for alkalinity is 40 mg/L. Per DEP requirements, samples from the CWTP finished water have a minimum compliance level of 9.1 for pH and 37 mg/L for alkalinity. Samples from 27 distribution system locations have a minimum compliance level of 9.0 for pH and 37 mg/L for alkalinity. Results must not be below this level for more than 9 days in a six-month period. MWRA tests finished water pH and alkalinity daily at the CWTP Fin B sampling tap. When CWTP undergoes winter maintenance, samples are collected at the CWTP Fin A sampling tap. Distribution system samples are collected in March, June, September, and December.

Each CVA community provides its own corrosion control treatment. Individual CVA reports are found here:

<https://www.mwra.com/your-water-system/drinking-water-quality/annual-water-quality-test-results-0>.

Over the past six months, no sample results were below the compliance levels.

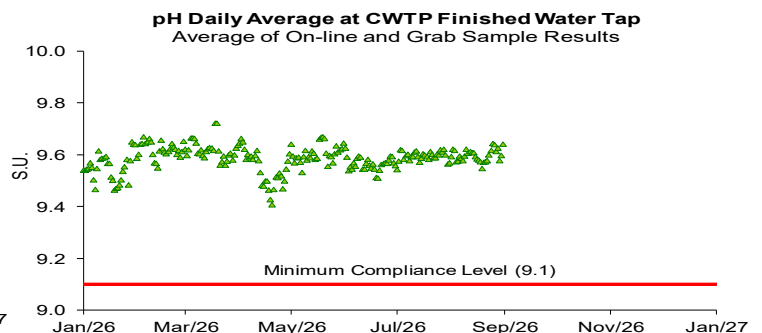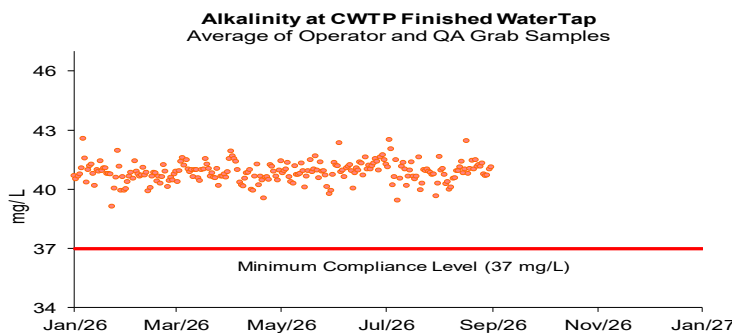

Bacteria & Chlorine Residual Results for Communities in MWRA the Testing Program

August 2026

While all communities collect bacteria samples and chlorine residual data for the Total Coliform Rule (TCR), data from the 46 systems that use MWRA's Laboratory or provide data to MWRA are reported below. Each community executes their own sampling program as required by MassDEP; the total number of samples collected depends upon the population served and the number of repeat samples required. MWRA's program includes sampling at the entry point to the distribution system, along the transmission system, as well as at all water storage tanks. A subset of the community sampling locations are included in MWRA's Shared Community TCR Program and are considered locations indicative of MWRA water as it enters the community system; however, these sites may be influenced by local pipe conditions or water meter activity ⁽¹⁾.

While samplers test chlorine residual in the field additional samples are collected for bacteria testing at a certified laboratory. Samples are tested for total coliform and *Escherichia coli* (*E.coli*). *E.coli* is a specific coliform species whose presence likely indicates potential contamination of fecal origin. If *E.coli* are detected in a drinking water sample, this is considered evidence of a potential public health concern. Public notification is required if repeat tests confirm the presence of *E.coli* or total coliform. Total coliform provide a general indication of the sanitary condition of a sample tap and/or water supply. If total coliform are detected in more than 5% of samples in a month (or if more than one sample is positive when less than 40 samples are collected), the water system is required to investigate the possible cause with a Level 1 or 2 Assessment, and correct any identified problems. A disinfectant residual is intended to maintain the sanitary integrity of the water; MWRA considers a residual of 0.2 mg/L a minimum target level at all points in the distribution system.

		Total Coliform		E.coli	Assessment	Chlorine Residual (mg/L) ⁽³⁾		
		# Samples	# (%) Positive	#Positive	Required	Max	Min	Avg
MWRA ⁽¹⁾	MWRA Locations	147	4 (2.7%)	0		2.98	1.68	2.43
	Shared Community/MWRA sites	498	5 (1.0%)	0		3.30	0.52	2.06
	Total: MWRA	645	9 (1.4%)		No			
Fully Served	ARLINGTON	52	0 (0%)	0		2.17	0.38	1.73
	BELMONT	40	0 (0%)	0		2.43	0.86	1.76
	BOSTON	255	1 (0.4%)	0	No	2.81	0.62	2.12
	BROOKLINE	76	1 (1.3%)	0	No	2.56	0.69	1.97
	CHELSEA	55	0 (0%)	0		2.42	1.29	1.99
	DEER ISLAND	20	0 (0%)	0		2.38	1.35	2.01
	EVERETT	65	0 (0%)	0		2.78	1.02	2.00
	FRAMINGHAM	97	2 (2.1%)	0	No	2.98	0.05	1.99
	LEXINGTON	45	0 (0%)	0		2.54	0.75	2.00
	LYNNFIELD	9	1 (11.1%)	0	No	2.45	1.32	1.72
	MALDEN	93	3 (3.2%)	0	No	2.85	0.90	1.77
	MARBLEHEAD	24	0 (0%)	0		2.33	1.07	1.94
	MARLBOROUGH	54	0 (0%)	0		3.30	0.45	2.24
	MEDFORD	81	3 (3.7%)	0	No	2.30	0.52	1.73
	MELROSE	36	0 (0%)	0		2.10	1.10	1.57
	MILTON	37	1 (2.7%)	0	No	2.31	0.90	1.70
	NAHANT	10	0 (0%)	0		2.16	0.89	1.75
	NEWTON	93	0 (0%)	0		2.40	1.02	2.04
	NORTHBOROUGH	16	0 (0%)	0		2.50	1.00	1.75
	NORWOOD	42	4 (9.5%)	0	Yes	2.24	0.91	1.77
	QUINCY	108	2 (1.9%)	0	No	2.57	1.04	1.90
	READING	44	0 (0%)	0		2.37	0.37	1.66
	REVERE	72	0 (0%)	0		2.54	0.80	1.97
	SAUGUS	32	0 (0%)	0		2.27	1.57	1.90
	SOMERVILLE	87	1 (1.2%)	0	No	2.48	1.21	2.09
	SOUTHBOROUGH	12	0 (0%)	0		3.20	0.78	2.46
	STONEHAM	28	0 (0%)	0		2.46	2.03	2.25
	SWAMPSCOTT	19	0 (0%)	0		2.29	0.07	1.34
	WALTHAM	75	0 (0%)	0		2.82	1.32	2.19
	WATERTOWN	44	0 (0%)	0		2.50	0.97	1.93
	WESTON	15	0 (0%)	0		2.84	2.05	2.41
	WINTHROP	24	0 (0%)	0		2.49	1.05	1.97
	Total: Fully Served	1760	19 (1.1%)					
Partially Served or Boosted Systems ⁽²⁾	BEDFORD ⁽²⁾	19	0 (0%)	0		2.53	1.00	1.70
	BURLINGTON	47	0 (0%)	0		2.50	0.40	1.74
	CANTON	44	2 (4.5%)	0	No	2.47	0.05	1.43
	HANSCOM AFB	11	0 (0%)	0		1.90	0.08	1.05
	NEEDHAM	41	0 (0%)	0		2.50	0.42	1.72
	PEABODY	78	1 (1.3%)	0	No	2.88	1.08	2.13
	WAKEFIELD	43	1 (2.3%)	0	No	2.38	0.79	1.77
	WELLESLEY	37	0 (0%)	0		2.39	0.01	1.14
	WILMINGTON	33	0 (0%)	0		3.06	0.48	1.90
	WINCHESTER	32	0 (0%)	0		2.38	0.25	1.61
	WOBURN	75	0 (0%)	0		2.45	0.24	1.11
Total: Partially Served & Boosted Systems		460	4 (0.9%)					
Total: Fully & Partially Served & Boosted Systems		2220	23 (1.0%)					
CVA Part of the Chicopee Valley Aqueduct System. Free chlorine system	MWRA CVA Locations	35	0 (0%)	0		1.05	0.33	0.81
	CHICOPEE	65	0 (0%)	0		0.94	0.01	0.39
	SOUTH HADLEY FD1	20	0 (0%)	0		0.98	0.06	0.50
	WILBRAHAM	15	0 (0%)	0		1.02	0.02	0.43
	Total: CVA	135	0 (0%)					



Notes:

(2) May mix their chlorinated supply with MWRA chloraminated supply

(3) Chlorine residual results <0.5 mg/L will be shown in *blue italics*.

Bacteria & Chlorine Residual Results for Communities in the MWRA Testing Program

August 2026

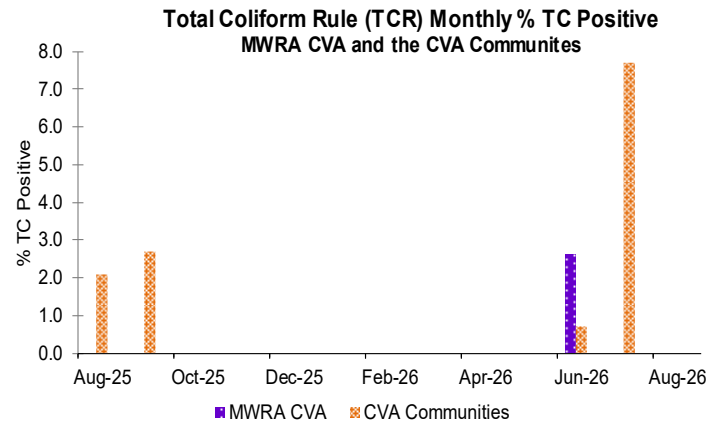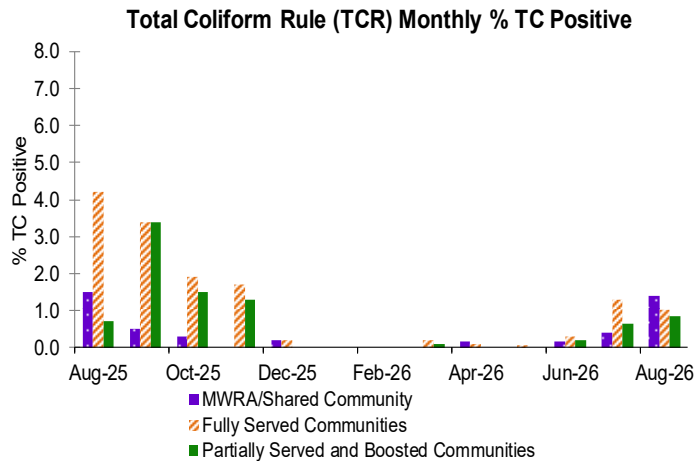

Chlorine Residuals in Fully/Partially Served and Boosted Communities

Free Chlorine Residuals in the CVA System

Fully Served Communities

		% <0.1	% <0.2	% <0.5	% <1.0	% >1.0
2026	Aug	0.23	0.3	1.0	2.9	97.1
	Jul	0.00	0.0	0.3	2.3	97.7
	Jun	0.00	0.0	0.3	1.0	99.0
	May	0.00	0.0	0.3	0.7	99.3
	Apr	0.00	0.1	0.3	0.8	99.2
	Mar	0.00	0.1	0.3	0.9	99.1
2025	Feb	0.00	0.2	0.5	1.4	98.6
	Jan	0.06	0.1	0.5	1.7	98.3
	Dec	0.05	0.5	1.0	3.0	97.0
	Nov	0.12	1.6	3.6	8.7	91.3
	Oct	0.17	0.7	2.8	6.1	93.9
	Sep	0.05	0.4	2.1	4.6	95.4
	Aug	0.06	0.3	1.9	5.2	94.8

Chicopee

		% <0.1	% <0.2	% <0.5	% <1.0	% >1.0
2026	Aug	16.92	26.2	67.7	100	0.0
	Jul	10.4	19.4	58.2	100	0.0
	Jun	10.8	16.9	49.2	100	0.0
	May	1.5	7.7	46.2	100	0.0
	Apr	0.0	4.6	40.0	100	0.0
	Mar	1.5	1.5	33.8	100	0.0
2025	Feb	1.5	4.6	13.8	98	1.5
	Jan	1.5	3.1	20.0	97	3.1
	Dec	7.7	20.0	50.8	100	0.0
	Nov	24.6	36.9	75.4	100	0.0
	Oct	23.1	35.4	70.8	100	0.0
	Sep	16.9	24.6	61.5	100	0.0
	Aug	18.5	30.8	60.0	100	0.0

Partially Served and Boosted Communities

		% <0.1	% <0.2	% <0.5	% <1.0	% >1.0
2026	Aug	1.97	2.6	9.6	23.2	76.8
	Jul	2.0	2.9	7.3	16.9	83.1
	Jun	1.0	1.0	6.7	13.9	86.1
	May	1.1	1.4	5.3	15.1	84.9
	Apr	0.9	0.9	5.8	18.1	81.9
	Mar	0.6	1.2	5.6	20.4	79.6
2025	Feb	0.9	1.6	7.5	21.5	78.5
	Jan	1.2	2.8	12.3	26.5	73.5
	Dec	1.7	4.8	16.6	30.1	69.9
	Nov	2.9	7.0	17.9	36.1	63.9
	Oct	2.4	5.7	12.5	28.8	71.2
	Sep	2.0	4.3	11.7	26.2	73.8
	Aug	2.3	3.4	10.1	25.2	74.8

South Hadley

		% <0.1	% <0.2	% <0.5	% <1.0	% >1.0
2026	Aug	5.00	15.0	60.0	100	0.0
	Jul	4.2	12.5	70.8	100	0.0
	Jun	9.5	23.8	71.4	95	4.8
	May	0.0	20.0	65.0	100	0.0
	Apr	10.0	25.0	70.0	100	0.0
	Mar	15.0	15.0	80.0	100	0.0
2025	Feb	10.0	20.0	75.0	100	0.0
	Jan	15.0	25.0	70.0	100	0.0
	Dec	10.0	35.0	80.0	100	0.0
	Nov	10.5	31.6	78.9	100	0.0
	Oct	10.0	20.0	65.0	100	0.0
	Sep	25.0	41.7	66.7	100	0.0
	Aug	18.2	54.5	81.8	100	0.0

Wilbraham

		% <0.1	% <0.2	% <0.5	% <1.0	% >1.0
2026	Aug	20.00	33.3	53.3	86.7	13.3
	Jul	13.3	26.7	60.0	100	0.0
	Jun	13.3	26.7	73.3	100	0.0
	May	13.3	33.3	60.0	100	0.0
	Apr	20.0	20.0	66.7	100	0.0
	Mar	6.7	26.7	66.7	100	0.0
2025	Feb	6.7	26.7	60.0	100	0.0
	Jan	0.0	26.7	73.3	100	0.0
	Dec	0.0	53.3	80.0	100	0.0
	Nov	0.0	53.3	73.3	100	0.0
	Oct	0.0	40.0	86.7	100	0.0
	Sep	0.0	36.8	84.2	100	0.0
	Aug	0.0	21.1	89.5	100	0.0

Treated Water - Disinfection By-Product (DBP) Levels in Communities

August 2026



Total Trihalomethanes (TTHMs) and Haloacetic Acids (HAA5s) are by-products of disinfection treatment with chlorine. They are of concern due to their potential adverse health effects at high levels. EPA's locational running annual average (LRAA) standard, using the most recent four quarterly results, is 80 µg/L for TTHMs and 60 µg/L for HAA5s. The locational running annual average at each individual sampling location must be below the standard.

Bromate is tested monthly as required for water systems, like CWTP, that treat with ozone. EPA's RAA Maximum Contaminant Level (MCL) standard for bromate is 10 µg/L. The current RAA for Bromate at the CWTP finished water tap is 0.0 µg/L.



MWRA's TTHM and HAA5 sampling program includes sampling at 33 MetroWest and Metro Boston communities sites. Partially served and CVA communities are responsible for their own compliance monitoring and are regulated individually.

The LRAA for TTHMs and HAA5s for MWRA's Compliance Program (represented as the line in the top two graphs below) remains below current standards. The Max LRAA in the quarter for TTHMs = 9.9 µg/L; HAA5s = 11.7 µg/L. No LRAA exceedances or violations occurred this quarter for MetroBoston and for any of the CVA communities.

MetroBoston Disinfection By-Products

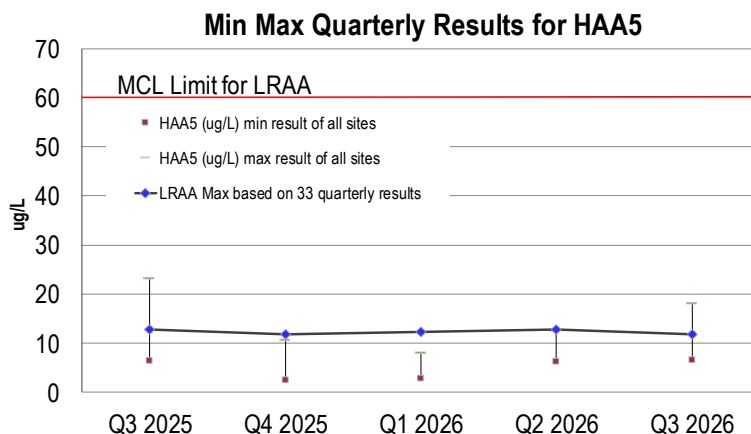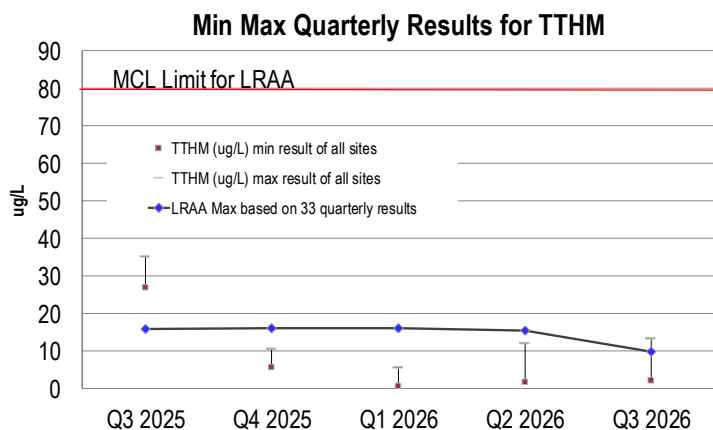

CVA Disinfection By-Products (Combined Results Chicopee, Wilbraham, & South Hadley FD1)

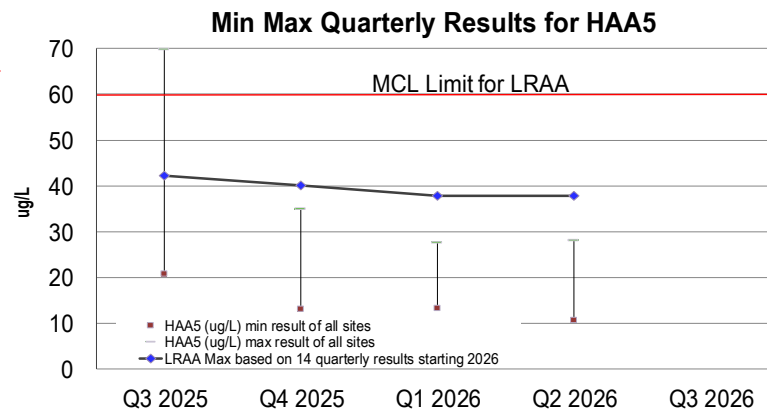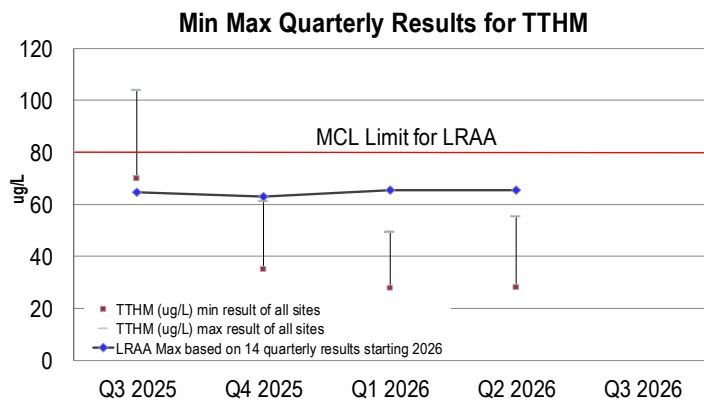

Notes: CVA Disinfection charts are updated at the end of each quarter. LRAA Max based on 15 quarterly results prior to 2026.

MWRA Monthly Water Quality Analysis

August 2026

This page provides information on water quality at four locations in the MWRA transmission system. Results reflect a "snapshot" in time and may not represent typical conditions. Monitoring for parameters indicated in regular font is quarterly as they either have minimal variability or are always below detection limits. The "Wachusett System" locations represent raw water from the Wachusett Reservoir (CWTP inlet) and finished water leaving the treatment plant (CWTP Finished water tap). The "CVA System" locations represent raw water from the Quabbin Reservoir (Brutsch Water Treatment Facility) and finished water after all treatment (Ludlow Monitoring Station). See www.mwra.com for additional information on other parameters which are monitored less frequently. All samples are analyzed by MWRA and contract laboratories.

CVA System			Wachusett System Metro-Boston		Standards →			
Component	Brutsch Water Treatment Facility (Raw)	Ludlow Monitoring Station (Treated)	Carroll Water Treatment Plant Inlet (Raw)	Carroll Water TP Fin. Water Tap (Treated)	Health Standard	Aesthetics or Other Standards	Units	Method Reporting Limit
Alkalinity ⁽³⁾	4.0	5.0	6.2	40.8			MG/L	0.05
Aluminum	U	U	U	U		50-200 (c)	UG/L	15.0
Ammonia-N, Total	0.005	U	0.008	0.455			MG/L	0.005
Antimony	U	U	U	U	6 (b)		UG/L	0.4
Arsenic	U	U	U	U	10 (b)		UG/L	1.0
Barium	6.0	6.0	9.0	9.0	2000 (b)		UG/L	2.0
Beryllium	U	U	U	U	4 (b)		UG/L	0.3
Bromate	U	U	U	U	10 (b)		UG/L	5.0
Bromide	9.9	U	12.6	7.5			UG/L	5.0
Cadmium ⁽¹⁾	U	U	U	U	5 (b)		UG/L	0.5
Calcium	2200	2260	4280	4350			UG/L	50
Chloride	8.3	9.2	25.5	25.2		250 (c)	MG/L	0.5
Chlorine, Free		0.97			4 (b)(d)		MG/L	0.02
Chlorine, Total				2.8	4 (b)(d)		MG/L	0.02
Chromium, Total	U	U	U	U	100 (b)		UG/L	2.5
Coliform, Fecal, MF Method	U		U		20 (a)		CFU/100 mL	1
Coliform, Total, Colilert Method ⁽⁴⁾	4839	U	1950	U	100 (a) 0 (b)		MPN/100 mL	1
Color	16	11	18	6		15 (c)	CU	
Copper **	U	U	U	U		1300 (e) 1000 (f)	UG/L	3.0
Fluoride ⁽⁵⁾	U	U	U	0.44	4 (b)(h)	2 (2)	MG/L	0.02
Hardness ⁽²⁾	7.6	7.7	14.1	14.3			MG/L	0.194
Iron **	8.3	7.5	23.4	33.6		300 (c)	UG/L	6.0
Lead **	U	U	U	U		15 (e)	UG/L	0.05
Magnesium	514	506	837	839			UG/L	35
Manganese	U	U	6.0	5.0		50 (c) 300 (g)	UG/L	0.1
Mercury ⁽¹⁾	U	U	U	U	2 (b)		UG/L	0.05
Nickel	U	U	0.7	U			UG/L	0.5
Nitrate-N	U	U	0.0296	0.0323	10 (b)		MG/L	0.005
Nitrite	U	U	U	U	1 (b)		MG/L	0.005
Orthophosphate	0.0057	U	0.0084	U			MG/L	0.0025
pH ⁽³⁾	7.1	7.6	6.9	9.6			S.U.	
Potassium	578	584	905	840			UG/L	200
Selenium	U	U	U	U	50 (b)		UG/L	1.0
Silica (SiO2)	1350	1760	1970	2650			UG/L	200.0
Silver	U	U	U	U		100 (c)	UG/L	1.0
Sodium	5.87	7.02	16.1	34.2			MG/L	0.2
Specific Conductance	49	55	109	190			UMHO/cm	0.3
Standard Plate Count, HPC	110	U	81	U	500 (b)		CFU/mL	1
Sulfate (SO4)	3.6	3.5	10.0	4.7		250 (c)	MG/L	1.0
Thallium	U	U	U	U	2 (b)		UG/L	0.3
Total Dissolved Solids	33	U	64	114		500 (c)	MG/L	13
Total Organic Carbon	2.1	2.0	2.4	2.4			MG/L	0.3
Total Phosphorus	U	U	U	U			MG/L	0.005
UV-254	0.023	0.018	0.041	0.034			A/cm	0.000965
Zinc **	U	2.0	U	2.0		5000 (c)	UG/L	1.5

(a) = Primary MCL standard (health related), applies to source (raw) water only. DEP "Drinking Water Regulations", 310 CMR 22.00. The Primary MCL for Fecal coliform when both fecal and total coliform are tested.

(b) = Primary MCL standard (health related). DEP "Drinking Water Regulations", 310 CMR 22.00. Applies to samples of treated water downstream of Wachusett and Quabbin Reservoirs. Most based on annual average.

(c) = Secondary MCL standard (aesthetic related). DEP "Drinking Water Regulations", 310 CMR 22.00.

(d) = Maximum Residual Disinfectant Level. DEP "Drinking Water Regulations", 310 CMR 22.00. Based on annual average.

(e) = Refers to 90th percentile Action Level. Lead results will vary at your home dependent on household plumbing.

(f) = Refers to a single sample, secondary MCL.

(g) = DEP Advisory Level, reference <https://www.mass.gov/doc/manganese-in-drinking-water-typical-questions-and-answers-for-consumers-0/download>

(h) = Fluoride level recommended by CDC for dental health is 0.7 mg/L

U = Less than method reporting limit

MCL = Maximum Contaminant Level

█ = Not Applicable

S.U. = Standard Units

CFU = Colony Forming Unit

CU = Color Unit

NTU = Nephelometric Turbidity Unit

MG/L = milligrams per liter = parts per million

UG/L = micrograms per liter = parts per billion

MPN = Most Probable Number

HPC = Heterotrophic Plate Count (48 Hrs @ 35 °C)

** = Metal results may be elevated due to local plumbing at the sample tap.

***Bold Italics = Samples from August**

Regular Font = Quarterly results from July samples

*Results reported are from single grab samples collected August 3, 4, and 5, 2026

NOTES:

(1) Due to MWRA lab equipment having higher sensitivity, MWRA's tests for several parameters are more sensitive than the EPA-set levels of detection and reporting. For example, the EPA minimum detection limit for cadmium is 1 ug/L and 0.2 ug/L for mercury, and MWRA lab tests and reports at lower than these detection limits.

(2) MWRA water is considered soft. Water hardness is characterized by the amount of dissolved minerals in the water, in particular calcium and magnesium. MWRA water has a hardness of about 15-20 mg/l or about 1 grain/gallon (1 grain/gallon = 17.1 mg/L). For comparison, hard water would have greater than 75 mg/l hardness.

(3) MWRA adjusts the alkalinity and pH. See page 6 for further details.

(4) Reviews of the historical data record for Quabbin and Wachusett Reservoirs consistently showed that elevated total coliforms occur seasonally, generally from early July through October. When measuring both total and fecal coliform in source water, Surface Water Treatment Rule compliance in an unfiltered system is based on the fecal coliform level.

(5) MWRA adjusted the CWTP fluoride residual target to 0.50 mg/L on June 5, 2026 and continued with the same target in August. Both MassDEP and MassDPH were notified. This adjustment was made to extend inventory of hydrofluorosilicic acid (HFS) as a result of vendor supply issues. The MWRA is watching the HFS market conditions closely and keeps in communication with suppliers across the United States. We expect to stay at this reduced target until our confidence in the supply chain improves.