For more information, please contact MWR at (617) 242-5323, or visit www.mwra.com.



ACHUSETTS WATER RESOURCES AUTHORITY 100 First Avenue, Charlestown Navy Yard, Boston, MA 02129



# MWRA WATER QUALITY UPDATE

### March 2006 Highlights

•MWRA achieved CT disinfection requirements for the month at the Ware Disinfection Facility (WDF) and the Carroll Water Treatment Plant (CWTP). CT results appear on Page 5. One community had a total coliform positive sample. See Page 7.

•In an effort to further optimize corrosion control to minimize lead corrosion from home plumbing and service lines, the pH target was increased to 9.3 (from 9.1) on March 16. Lead and copper compliance samples were collected in late March from all MWRA served communities. Results will be available May and will be published in the May or June Water Quality Update depending on timing. See Page 6.

We are continually updating the report. Let us know what you think (617) 242-5323 Call (617) 242-5323 or email Joshua.Das@mwra.state.ma.us

Release Date: April 20, 2006

### Water Quality Update


This is a monthly report containing information about the quality of water supplied by MWRA. It provides a more detailed review of water quality than the annual water quality report that is mailed each June to customers in our service area. The report is available at www.mwra.com.

### The Water System

The MWRA supplies wholesale water to local water departments in 50 communities, 44 in greater Boston and MetroWest, three in Western Massachusetts, and as a back-up supply for three others. Each municipality is responsible for distributing the water within its own community. More than two million people are served by the MWRA water supply system.

Quabbin Reservoir is the primary source of water for our system and one of the country's largest water supply impoundments, with a capacity of 412 billion gallons. Quabbin water represents source water for the Chicopee Valley Aqueduct (CVA) system. Water is transferred from Quabbin Reservoir to the 65 billion gallon Wachusett Reservoir in Clinton via the Quabbin Aqueduct. Wachusett water represents source water for MetroWest and Metropolitan Boston communities. The watershed areas of the Quabbin and Wachusett Reservoirs total 401 square miles. The Department of Conservation and Recreation (DCR), which manages the watersheds, and MWRA are committed to protection of the water supply through aggressive watershed protection as the first line of defense against water contamination. Three-quarters of the watersheds are protected lands and over 80% are either forest or wetlands.

The map below indicates the location of reservoirs, treatment facilities, and service communities.

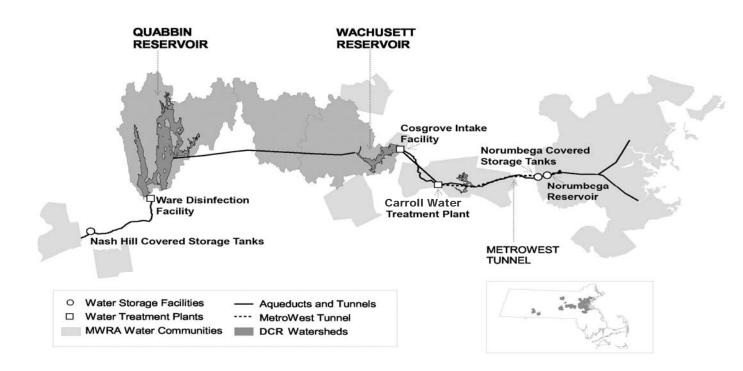

### **Indicators of Water Quality**

Tests are conducted on water sampled at the source reservoirs (source or raw water) and also on water after treatment (treated water). MWRA routinely uses six general indicators of water quality: microbial, corrosiveness, disinfection by-products, turbidity and algae, disinfectant residual, and mineral analysis. Testing frequencies vary by parameter.

The Federal Safe Drinking Water Act (SDWA) sets standards for source and treated water quality. The standards relate to coliform, turbidity, watershed protection, disinfection and disinfection by-products, over 120 potential chemical contaminants, and waterborne disease outbreaks. MWRA monitors for these parameters on schedules ranging from daily to annually.

Customer communities must also meet certain standards under the SDWA concerning distribution of treated drinking water. The Total Coliform Rule (TCR) helps to alert communities to possible microbial contamination as well as the adequacy of residual disinfection within the local distribution system. MWRA tests over 1500 samples per month. Under the SDWA, a violation of the TCR occurs when greater than 5% of the samples in a community are positive for total coliform during a month.

### Source Water – Microbial Results March 2006

#### **Source Water - Microbial Results**

Total coliform bacteria are monitored in both source and treated water to provide an indication of overall bacteriological activity. Most coliforms are harmless. Fecal coliform, a subclass of the coliform group, are identified by their growth at temperatures comparable to those in the intestinal tract of mammals. They act as indicators of possible fecal contamination. The Surface Water Treatment Rule for unfiltered supplies requires that no more than 10% of source water samples prior to disinfection over a six-month period have more than 20 fecal coliforms per 100ml.

#### Sample Site: Quabbin Reservoir

Quabbin Reservoir water is sampled at the Ware Disinfection Facility (WDF) raw water tap before entering the CVA system. MWRA met the six-month running average standard for fecal coliform continuously at this location over the last year.

Four of the 31 samples were positive during March. None of the samples exceeded a count of 20 cfu/100ml.

For the current six-month period, 0.0% of the samples have exceeded a count of 20 cfu/100ml.


#### Sample Site: Wachusett Reservoir

Wachusett Reservoir water is sampled before it enters the MetroWest and Metropolitan Boston systems at the Carroll Water Treatment Plant raw water tap in Marlborough.

Fecal coliform levels tend to increase during the winter because, when water bodies near Wachusett ice over, waterfowl seek open water. Many roost at Wachusett, which tends to freeze later in the year than smaller ponds nearby. The DCR has an active bird harassment program to move the birds away from the intake area.

Fifteen of the 23 samples were positive during March. None of the samples exceeded a count of 20 cfu/100ml.

For the current six-month period, 0.0% of the samples have exceeded a count of 20 cfu/100ml.

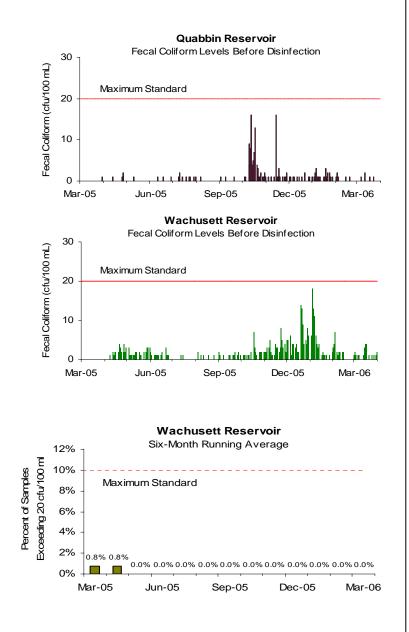


## Source Water – Turbidity and Algae Results March 2006

#### Source Water – Turbidity Results

Turbidity is a measure of suspended and colloidal particles including clay, silt, organic and inorganic matter, algae and microorganisms. The effects of turbidity depend on the nature of the matter that causes the turbidity. High levels of particulate matter may have a higher chlorine demand or may protect bacteria from the disinfectant effects of chlorine, thereby interfering with the disinfectant residual throughout the distribution system.


Samples for turbidity from Quabbin Reservoir are collected at the Ware Disinfection Facility before chlorination. Samples from Wachusett Reservoir are taken at the Carroll Water Treatment Plant inlet (raw water line) before treatment. The Massachusetts Department of Environmental Protection standard for source water turbidity for unfiltered water supply systems is a maximum of 1.0 NTU; the EPA standard is a maximum of 5.0 NTU. Maximum turbidity results at Quabbin and Wachusett were within DEP standards for the month.

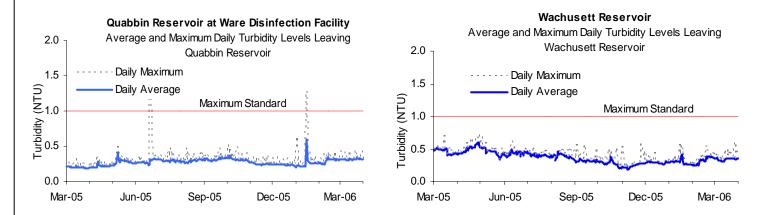

#### Source Water – Algae Results

Algal levels in reservoirs are monitored by DCR and MWRA. These results, along with taste and odor complaints, are used to make decisions on source water treatment for algae control. Most taste and odor complaints at the tap are due to algae, which originate in source reservoirs, typically in trace amounts. Occasionally, a particular species grows rapidly, increasing its concentration in water. When *Synura, Anabaena*, or other nuisance algae blooms, MWRA may treat the reservoir with copper sulfate, an algaecide.

Algae levels are currently low and no nuisance algae are present above trigger levels for March

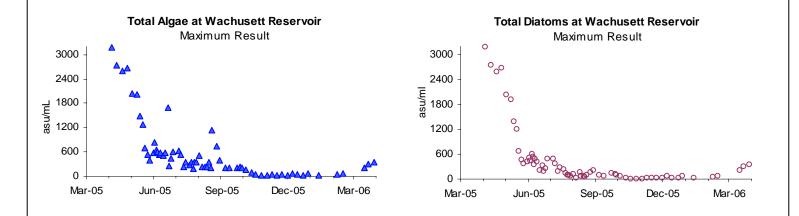

### Treated Water – Disinfection Results March 2006


### **Treated Water - Primary Disinfection**

With the activation of the Carroll Water Treatment Plant, MWRA now reports on both regulatory required 99.9% inactivation for *Giardia*, and our voluntary operating goal of 99% inactivation for *Cryptosporidium*. The concentration (C) of the disinfectant over time (T) yields a measure of the effectiveness of disinfection. CT achievement for *Giardia* assures CT achievement for viruses, which have a lower CT requirement. The required CT for ozonated water varies with water temperature. MWRA calculates hourly CT inactivation rates and reports daily CT inactivation rates at maximum flow, as specified by EPA regulations.

### Wachusett Reservoir – MetroWest/MetroBoston Supply:

*Cryptosporidium* inactivation is reported as Performance Ratio (PR) to avoid confusion with the regulatory requirements. A PR of 1 demonstrates inactivation of 99% of *Cryptosporidium* based on site-specific data. For 45 minutes on March 29, MWRA's goal of maintaining PR>1 was not met (PR dropped to 0.62). A power reduction to one of the ozone generators resulted in a reduced ozone dose to contactors 3 and 4 for a short period. PR was maintained above 1 for all of the other times the plant was providing water into the distribution system.


Ozone dose at Carroll Water Treatment Plant (CWTP) varied between 3.2 to 3.5 mg/L for March. CT calculation for *Giardia* is conservative; subsequently, more inactivation occurs than is being reported. Compliance with the *Giardia* standard is expressed as percent of required CT achieved: 100% is the minimum allowed. A drop in CT from March 27 to 30 occurred when the fourth ozone analyzer in all of the contactors were taken off-line for maintenance work, although actual disinfection levels did not drop. CT was met each day in March, as well as every day for the last year.

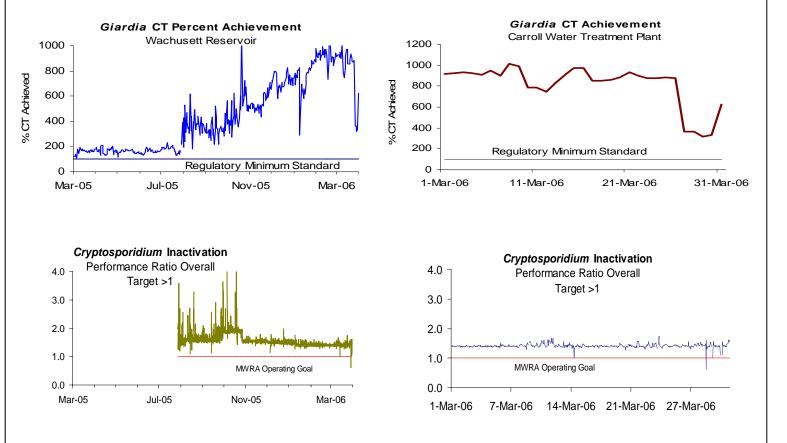

## Treated Water – Disinfection, pH and Alkalinity Results March 2006


### Quabbin Reservoir at Ware Disinfection Facility (CVA Supply):


Chlorine dose remained at 1.3 mg/L. Chlorination at the Ware Disinfection Facility was interrupted for 1.5 hours on March 13 due to a chemical feed problem. The problem was corrected and chemical addition resumed. CT was met each day at maximum flow in March, as well as every day for the last year.

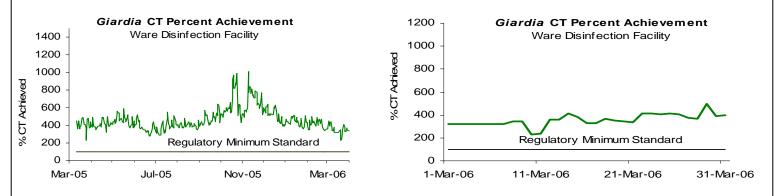

### pH and Alkalinity Compliance:

MWRA adjusts the alkalinity and pH of Wachusett water to reduce its corrosivity in order to minimize the leaching of lead and copper from service lines and home plumbing systems into the water. MWRA's target for distribution system pH is 9.1 and alkalinity is 40 mg/l. Per DEP requirements, daily samples from CWTP Fin B site have a minimum compliance level of 8.9 for pH and 37 mg/L for alkalinity. In addition, quarterly samples from 27 distribution system taps have a minimum compliance level of 8.8 for pH and 37 mg/L for alkalinity. For no more than nine days in a six-month period may results be below these levels. Quality Assurance and operator staff test pH and alkalinity daily at Carroll Water Treatment Plant Fin B. Distribution system samples are collected March, June, September, and December. Distribution system samples were collected on March 21, 2006. Distribution system sample pH ranged from 9.1 to 9.6 and alkalinity ranged from 42 to 45 mg/L. In March, no sample results were below the target levels.

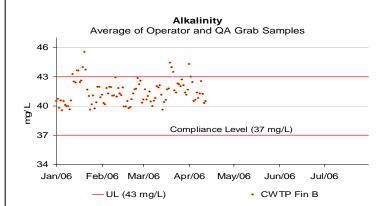

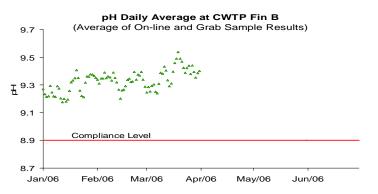

### Bacteria & Chlorine Residual Results for Communities in MWRA Testing Program March 2006

While all communities collect bacteria samples for the Total Coliform Rule (TCR), 38 systems (including Deer Island and Westboro State Hospital) use MWRA's Laboratory for TCR compliance testing. These systems collect samples for bacteriological analysis and measure water temperature and chlorine residual at the time of collection. The other ten MWRA customer communities (including Lynn's GE plant) have their samples tested elsewhere and these towns should be contacted directly for their monthly results.

There are 141 sampling locations for which MWRA is required to report TCR results. These locations include a subset of the community TCR locations as well as sites along MWRA's transmission system, water storage tanks and pumping stations.

The Safe Drinking Water Act (SDWA) requires that no more than 5% of all samples may be total coliform positive in a month (or that no more than one sample be positive when less than 40 samples are collected each month). Public notification is required if this standard is exceeded.

*Escherichia coli* (*E.coli*) is a specific coliform species that is almost always present in fecal material and whose presence indicates likely bacterial contamination of fecal origin. If *E. coli* are detected in a drinking water sample, this is considered evidence of a critical public health concern. Additional testing is conducted immediately and joint corrective action by DEP, MWRA, and the community is undertaken. Public notification is required if follow-up tests confirm the presence of *E. coli* or total coliform. MWRA considers a disinfectant residual of 0.2 mg/L a minimum target level at all points in the distribution system.

#### Highlights

One of the 1,822 community samples (0.05%) system-wide tested positive for confirmed total coliform during the month of March. None of the 676 MWRA samples (0.15%) tested positive for confirmed total coliform. No samples tested positive for *E. coli*. All 38 systems that submitted chlorine residual data maintained an average disinfectant residual of at least 0.2 mg/L. Only 1.1% of the system samples had a disinfectant residual lower than 0.2 mg/L.

Oles Tested           coliform (a)           70           32           251           68           40           16           40           75	Total Coliform #           (%) Positive           0 (0%)           0 (0%)           0 (0%)           0 (0%)           0 (0%)           0 (0%)           0 (0%)           0 (0%)	E.coli % Positive	Public Notification Required?	March 2006 Minimum Chlorine Residual (mg/L) 0.05 0.94	March 2005 Minimum Chlorine Residual (mg/L) 0.01 0.68	Chlorine Residual (mg/L) 1.26	March 2005 Average Chlorine Residual (mg/L)
32 251 68 40 16 40 75	0 (0%) 0 (0%) 0 (0%) 0 (0%) 0 (0%)						1 10
32 251 68 40 16 40 75	0 (0%) 0 (0%) 0 (0%) 0 (0%) 0 (0%)						. I.IU
251 68 40 16 40 75	0 (0%) 0 (0%) 0 (0%) 0 (0%)				0.00	1.55	1.37
68 40 16 40 75	0 (0%) 0 (0%) 0 (0%)			1.16	0.15	1.78	1.51
40 16 40 75	0 (0%) 0 (0%)			1.33	1.30	1.74	1.68
16 40 75	0 (0%)			1.31	0.36	1.73	1.36
75	0 (0%)			1.39	1.38	1.68	1.53
75						0.79	0.92
	0 (0%)			0.48	0.09	1.44	1.24
45 I	0 (0%)			1.42	1.20	1.77	1.55
6	0 (0%)			0.49	0.59	0.93	1.20
60							0.97
							1.30
52				0.69	0.33	1.43	1.08
68	0 (0%)			0.47	0.42	1.53	1.28
36	0 (0%)			0.02	0.02	0.60	0.92
	0 (0%)			0.78	0.95	1.24	1.25
10				0.13	0.03	1.20	0.92
41				0.85	0.06	1.72	0.28
					0.62		1.62
16	0 (0%)			0.34	0.59	1.49	1.62
36	0 (0%)			0.16	0.51	1.27	1.28
98	0 (0%)			0.13	0.29	1.55	1.37
65	0 (0%)			1.02	0.91	1.63	1.46
32	0 (0%)			1.57	1.43	1.67	1.51
103	1 (0.97%)		no	0.20	0.37	1.61	1.46
16	0 (0%)		1	0.10	0.22	0.45	0.95
10				0.21	-	1.14	-
35	0 (0%)			1.20	0.60	1.68	1.46
18	0 (0%)			0.57	0.94	1.34	1.43
55	0 (0%)			0.63	0.45	1.32	1.15
72	0 (0%)			0.02	0.11	1.35	1.17
50	0 (0%)			0.16	0.13	1.36	1.40
36	0 (0%)			0.07	0.20	0.41	0.42
5	0 (0%)			0.24	0.23	1.26	0.77
16	0 (0%)			0.49	1.34	1.38	1.64
20	0 (0%)		1	0.09	0.15	0.71	0.59
24	0 (0%)		1	0.94	1.10	1.73	1.60
61	0 (0%)			0.04	0.07	0.56	0.64
1822							
			00	0.02	0.05	1.65	1.40
	$\begin{array}{c} 75 \\ 45 \\ 6 \\ 60 \\ 24 \\ 52 \\ 68 \\ 36 \\ 32 \\ 10 \\ 41 \\ 88 \\ 16 \\ 36 \\ 98 \\ 65 \\ 32 \\ 103 \\ 16 \\ 10 \\ 35 \\ 18 \\ 55 \\ 72 \\ 50 \\ 36 \\ 5 \\ 16 \\ 20 \\ 24 \\ 61 \\ \end{array}$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	75       0 (0%) $45$ 0 (0%) $6$ 0 (0%) $60$ 0 (0%) $60$ 0 (0%) $52$ 0 (0%) $52$ 0 (0%) $536$ 0 (0%) $36$ 0 (0%) $36$ 0 (0%) $10$ 0 (0%) $10$ 0 (0%) $41$ 0 (0%) $41$ 0 (0%) $41$ 0 (0%) $65$ 0 (0%) $36$ 0 (0%) $36$ 0 (0%) $36$ 0 (0%) $32$ 0 (0%) $32$ 0 (0%) $32$ 0 (0%) $32$ 0 (0%) $10$ 0 (0%) $10$ 0 (0%) $18$ 0 (0%) $55$ 0 (0%) $50$ 0 (0%) $51$ 0 (0%) $52$ 0 (0%) $53$ 0 (0%) $54$ 0 (0%) $55$ 0 (0%)	75       0 (0%)       0.48 $45$ 0 (0%)       0.49 $60$ 0 (0%)       0.23 $52$ 0 (0%)       0.69 $68$ 0 (0%)       0.47 $36$ 0 (0%)       0.78 $10$ 0 (0%)       0.78 $10$ 0 (0%)       0.35 $16$ 0 (0%)       0.35 $16$ 0 (0%)       0.34 $36$ 0 (0%)       0.35 $16$ 0 (0%)       0.16 $98$ 0 (0%)       0.13 $41$ 0 (0%)       0.16 $98$ 0 (0%)       0.16 $98$ 0 (0%)       0.10 $103$ 1 (0.97%)       no $103$ 1 (0.97%)       no $113$ 0 (0%)       0.10 $100$ 0.0%       0.10 $100$ 0.0%       0.10 $100$ 0.0%       0.21 $35$ 0 (0%)       0.57 $55$ 0 (0%)       0.02 $50$ 0 (0%)       0.024      <	75 $0 (0%)$ $0.48$ $0.09$ $45$ $0 (0%)$ $1.42$ $1.20$ $6$ $0 (0%)$ $0.49$ $0.59$ $60$ $0 (0%)$ $0.23$ $0.27$ $52$ $0 (0%)$ $0.69$ $0.33$ $68$ $0 (0%)$ $0.47$ $0.42$ $36$ $0 (0%)$ $0.02$ $0.02$ $32$ $0 (0%)$ $0.13$ $0.03$ $10$ $0 (0%)$ $0.13$ $0.03$ $11$ $0 (0%)$ $0.13$ $0.03$ $10$ $0 (0%)$ $0.35$ $0.66$ $10$ $0 (0%)$ $0.33$ $0.33$ $10$ $0 (0%)$ $0.13$ $0.03$ $10$ $0 (0%)$ $0.34$ $0.59$ $16$ $0 (0%)$ $0.146$ $0.51$ $98$ $0 (0%)$ $1.02$ $0.91$ $103$ $1 (0.97%)$ $no$ $0.20$ $0.37$ $16$ $0 (0%)$	$\begin{array}{c c c c c c c c c c c c c c c c c c c $

(a) The number of samples collected depends on the population served and the number of repeat samples required.

(b) These communities are partially supplied, and may mix their chlorinated supply with MWRA chloraminated supply

(c) Part of the Chicopee Valley Aqueduct System. Free chlorine system.

(d) MWRA sampling program includes a subset of community TCR sites as well as sites along the transmission system, tanks and pumping stations. Some MWRA TCR sites which are entry points to the community had low chlorine residuals due to various reasons.


## Treated Water - Disinfection By-Product (DBP) Levels in Communities March 2006

Total Trihalomethanes (TTHMs) and Haloacetic Acids (HAAs) are by-products of disinfection treatment with chlorine. Chlorination levels, the presence of organic precursors, pH levels, the contact time of water with chlorine used for disinfection, and temperature all affect TTHM and HAA levels. DBPs are of concern due to their potential adverse health effects at high levels. EPA's running annual average standards are 80 ug/L for TTHMs and 60 ug/L for HAA5. DEP has approved consolidating MetroWest and Metropolitan Boston programs since MWRA now provides fully treated water to both. This was implemented July 2005. DEP requires that compliance samples be collected quarterly. MWRA samples more frequently at some locations. Partially served communities are responsible for their own compliance monitoring and reporting and must be contacted directly for their results.

Absorbance, measured as UV-254, is a surrogate measure of reactive organic matter. Regulated DBP levels have dropped to very low levels with Carroll Water Treatment Plant coming on-line. However, UV-254 levels remain useful for estimating ozone dosage and serving as a trigger for Quabbin transfer consideration.

Bromate is tested monthly per DEP requirements for water systems that treat the water with ozone. Bromide in the raw water may be converted into bromate following ozonation. The EPA running annual average MCL standard for bromate is 10 ug/L.

The running annual average for TTHMs and HAA5s at compliance locations, represented as the line in the top two graphs below, remained below current standards. HAA5 and TTHM levels at all sampling locations for the MetroWest/Metropolitan Boston communities have declined dramatically since August 2005 following activation of the Carroll Water Treatment Plant which uses ozone, rather than chlorine for primary disinfection. CVA DBP levels continue to be below the standards. UV-254 levels are currently around 0.088 A/cm. Bromate results do not exceed the standard.

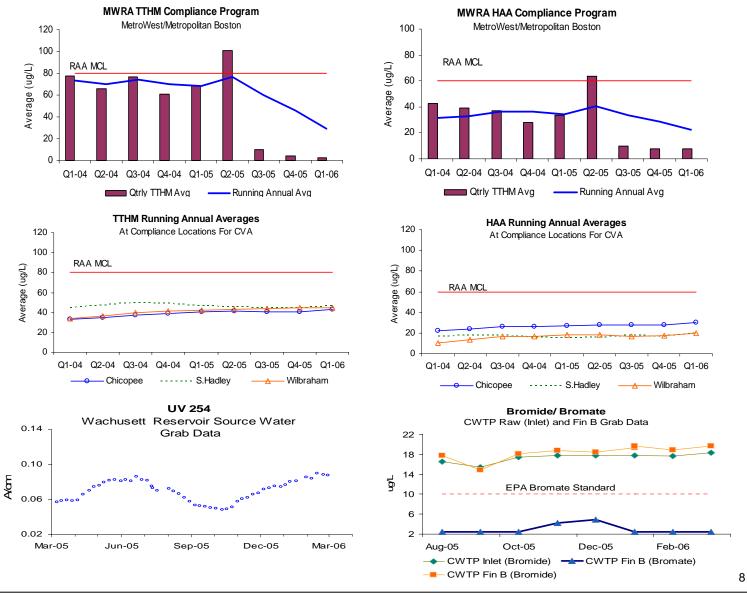

## MWRA Monthly Water Quality Analysis March 2006

This page provides information on water quality at five locations in the MWRA transmission system. Results reflect a "snapshot" in time and may not represent typical conditions. Monitoring for parameters indicated in bold is quarterly as they either have minimal variability or are always below detection limits. The "Wachusett System" locations represent: raw water from the Wachusett Reservoir (CWTP inlet), finished water leaving the treatment plant (CWTP Finished water tap), and a location at an endpoint in the main transmission system (Shaft 9A, Malden). The CWTP Finished water tap replaces the former locations ICC, Marlboro and Comm. Ave., Newton which represented intermediate treatment points. All treatment has now been consolidated at CWTP.

	CVA Sys	tem	Wachu	sett System	>	I Standards		
Component	Quabbin Res. at Ware Disinfection Facility (Raw)	Ludlow Monitoring Station (Treated)	Carroll Water TP Inlet (Raw) <sup>1</sup>	Carroll Water TP Fin. Water Tap (Treated) <sup>1</sup>	Shaft 9A, Malden (Treated)	Standard	Units	Exceedance
Alkalinity	2.5	2.9	5.9	40.2	42.1		MG/L	
Aluminum	17.7	1 <b>8</b> .8	30.6	23.6	20.7	50-200 (e)	UG/L	NO
Ammonia-N	0.01	< 0.01	0.01	0.47	0.40	- ( )	MG/L	
Antimony	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	6 (a)	UG/L	NO
Arsenic	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	50 (a)	UG/L	NO
Barium	7.0	7.0	10.0	9.8	10.0	2000 (a)	UG/L	NO
Beryllium	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3	4 (a)	UG/L	NO
Bromate	< 2.5	< 2.5	< 2.5	< 2.5	< 2.5	10 (a)	UG/L	NO
Bromide	10.1	5.6	18.3	19.5	19.6		UG/L	
Cadmium	< 0.5	< 0.5	< 0.5	< 0.5	< 0.5	5 (a)	UG/L	NO
Calcium	2130	2180	<b>4920</b>	<b>49</b> 10	<b>4990</b>		UG/L	
Chloride	7.8	<u>9.1</u>	25.7	30.0	30.0	250 (e)	MG/L	NO
Chlorine, Free	NS	0.72	NS	0.03	0.14	4 (c)(d)	MG/L	NO
Chlorine, Total	NS	NS	NS	2.5	2.0	4 (c)(d)	MG/L	NO
Chromium	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	100 (a)	UG/L	NO
Coliform, Fecal, MF Method	1	NS	1	NS	NS	20 (b)	CFU/100 mL	NO
Coliform, Total, MF Method (h)	1	0	2	0	0	100 (b) 0 (c)	CFU/100 mL	NO
Copper **	< 3.0	< 3.0	12	3.9	4.9	1300 (f) 1000 (g)		NO
Cyanide	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	0.2 (a)	MG/L	NO
Fluoride	< 0.02	< 0.02	< 0.02	1.07	1.03	4 (a)	MG/L	NO
Hardness	7.5	7.6	16.2	16.1	16.3		MG/L	
Iron **	12.8	13.4	39.2	34.8	41.3	300 (e)	UG/L	NO
Lead	< 1.2	< 1.2	< 1.2	< 1.2	< 1.2	15 (a)	UG/L	NO
Magnesium	528	525	<b>941</b>	939	941		UG/L	
Manganese	4.4	3.0	30.5	19.0	22.8	50 (e)	UG/L	NO
Mercury	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	2 (a)	UG/L	NO
Nickel	< 5.0	< 5.0	< 5.0	< 5.0	< 5.0		UG/L	
Nitrate-N	0.018	0.018	0.108	0.121	0.120	10 (a)	MG/L	NO
Nitrite	< 0.005	< 0.005	< 0.005	0.005	0.007	1 (a)	MG/L	NO
Orthophosphate	0.003	0.003	0.005	0.009	0.009		MG/L	
рН	7.3	6.8	7.4	9.4	9.4		S.U.	
Potassium	404	414	<u>969</u>	1020	1050		UG/L	
Selenium	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	50 (a)	UG/L	NO
Silica (SiO2)	2090	2080	3490	3930	<b>3920</b>		UG/L	
Silver	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	100 (e)	UG/L	NO
Sodium	5.2	<u>6.1</u>	15.6	34.5	34.6		MG/L	
Specific Conductance	48	53	138	215	218		UMHO/cm	
Standard Plate Count, HPC (48 Hrs								
@ 35C)	NS	NS	26	0	0	500 (c)	CFU/mL	NO
Sulfate (SO4)	4.9	4.9	7.3	9.7	9.5	250 (e)	MG/L	
Thallium	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	2 (a)	UG/L	NO
Total Dissolved Solids	34.0	43.0	81.0	120.0	124.0	500 (d)	MG/L	
Total Organic Carbon	1.8	1.9	2.5	2.5	2.5		MG/L	
Total Phosphorus	0.005	0.005	0.010	0.012	0.011		MG/L	
UV-254	0.028	0.019	0.093	0.040	0.036		A	
Zinc **	2.0	5.2	3.0	< 1.5	2.3	5000 (e)	UG/L	NO

(a) = Primary MCL standard (health related). DEP "Drinking Water Regulations", 310CMR 22.00.

(b) = Primary MCL standard (health related), applies to source (raw) water only. DEP "Drinking Water Regulations", 310CMR 22.00.

(c) = Primary MCL standard (health related). DEP "Drinking Water Regulations", 310CMR 22.00. Applies to samples of treated water downstream of Wachusett and Quabbin Reservoirs.

(d) = Maximum Residual Disinfectant Level. DEP "Drinking Water Regulations", 310CMR 22.00.

(e) = Secondary MCL standard (aesthetic related). DEP "Drinking Water Regulations", 310CMR 22.00.

(f) - Refers to 90th percentile Action Level

(g) - Refers to a single sample, secondary MCL

(h) - Confirmed results only are reported

MCL = Maximum Contaminant Level

CFU = Colony Forming Unit

S.U. = Standard Units

UG/L = micrograms per liter = parts per billion

NS = No sample NTU = Nephelometric Turbidity Unit MG/L = milligrams per liter = parts per million < = less than method detection limit HPC = Heterotrophic Plate Count Inv Res = Invalid sample result \*\* = Metal results may be elevated due to local plumbing at the sample tap. Bold Italics = Quarterly Samples

Most results are based on single grab samples collected on March 6 and 13, 2006 and analyzed by MWRA and contract laboratories. Quarterly Samples are from January 2006.

**NOTE**: MWRA tests for cadmium and mercury are more sensitive than the EPA-set levels of detection and reporting. For cadmium any level below 1.0 ug/L and for mercury any level below 0.2 ug/L are under the EPA minimum detection limits. MWRA will continue to report any result below these detection limits here in the monthly report but will follow EPA reporting requirements and not report them in the EPA-regulated annual Consumer Confidence Report.